



Venus III



Daiken were established in 1945 and have grown to be a world leader in the manufacturing of building materials.


Daiken Excel-Tone MR ceiling tiles provide outstanding moisture resistance and are guaranteed for 10 years against visible sagging.


Manufactured from select rockwool fibers and special binders, Daiken ceiling tiles offer fantastic acoustic absorption.

The mineral rockwool fibers are uniformly interwoven by a unique wet felting process to form rigid tiles that provide superior fire resistance.

The Venus III tile is 19mm thick and provides outstanding acoustic absorption.

The Venus III is a slightly textured tile with fine pinholes throughout, giving it a very clean modern look.

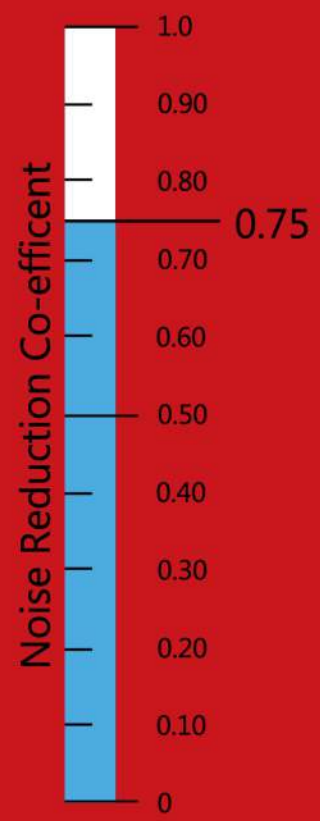

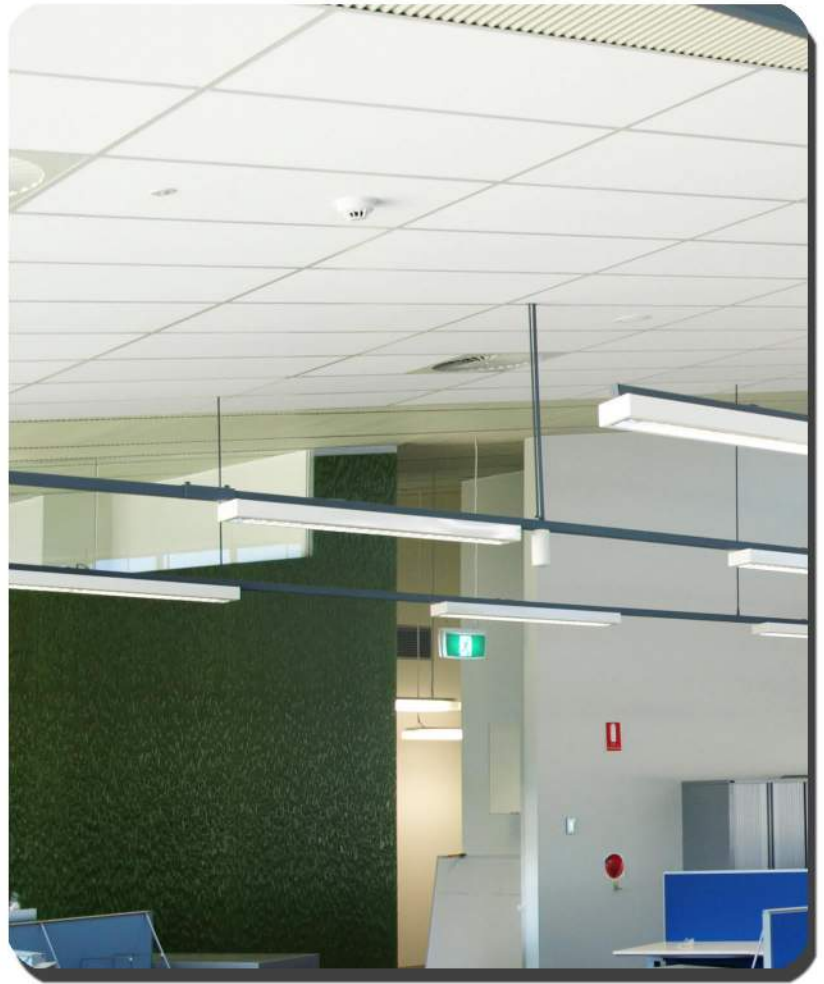



Renhurst
 CEILING SYSTEMS



Physical Properties	Value/Grade	Test Method
Moisture Content	2%	JIS A6301
Modulus of Rupture	17Kgf/cm ²	JIS A6301
Fire Propagation Test	Class 0	BS476 Part 6
Flame Spread	Class A	ASTM E84
Light Reflectance	>80%	ASTM E1477
Ceiling Attenuation Class (CAC)	33	ASTM E1414
Sound Absorption Coefficient (NRC)	0.75	ASTM C423

