




Hill Stand - Flemington Racecourse



Renhurst RenAcoustic Composite tiles combine the strength and versatility of a perforated calcium-silicate face, with the outstanding acoustic absorption properties of fibreglass.

RenAcoustic Composite tiles provide clear advantages over conventional perforated flush plaster ceilings. Tiles are pre finished alleviating the need for stopping and painting.

They are quickly installed in all standard two-way exposed grid systems allowing for easy access to essential services above.

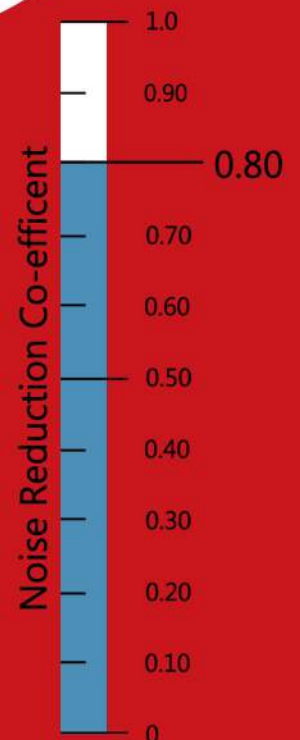



Tile Face

Hill Stand - Flemington Racecourse



## RENACOUSTIC COMPOSITE IN BRIEF

- 4.5mm x 4.5mm square perforation
- Excellent acoustic rating (NRC 0.80)
- Shallow tegular edge
- Lightweight
- Fully sealed
- Suitable for installation in standard two-way exposed grid systems including Renhurst Kwik Connect.

# Composite

.....  
*Designed for areas requiring high acoustic absorption RenAcoustic Composite are available in the following stock sizes:*

*1200mm x 600mm x 15mm*

*1200mm x 300mm x 15mm*

*600mm x 600mm x 15mm*



370 Degrees - Carlton