



MARS Panels with *CLIMAPLUS* Superior Performance/
DONN DX® Suspension System

ESD Information

Recycled Content: 76%
CLIMAPLUS Superior Performance for Mould/Mildew

★ Contributes to Green Star points ✓ ESD additional advantages

IEQ						Ene	Mat
Increase Daylight Levels	Reduce Lighting Levels	Internal Noise Level Reduction	Low Volatile Organic Compounds	Low Formaldehyde	Mould Prevention	Lighting Density Reduction	Design for Disassembly
★	★	★	✓	✓	✓	★	✓

Advantages


- Fine, monolithic texture.
- High light reflectance (LR .89).
- Excellent noise reduction (NRC .70).
- Durable, scratch-resistant, cleanable surface.
- Low maintenance panels look like new for years to come.
- *CLIMAPLUS* 30-year lifetime system warranty to withstand conditions up to 40°C/95% relative humidity without visible sag when used with a DONN® Brand suspension system.

Applications

- Open-plan offices
- Corridors
- Department stores
- Offices with indirect lighting
- Reception areas and lobbies
- Restaurants

Substrate

- X-Technology mineral fibre

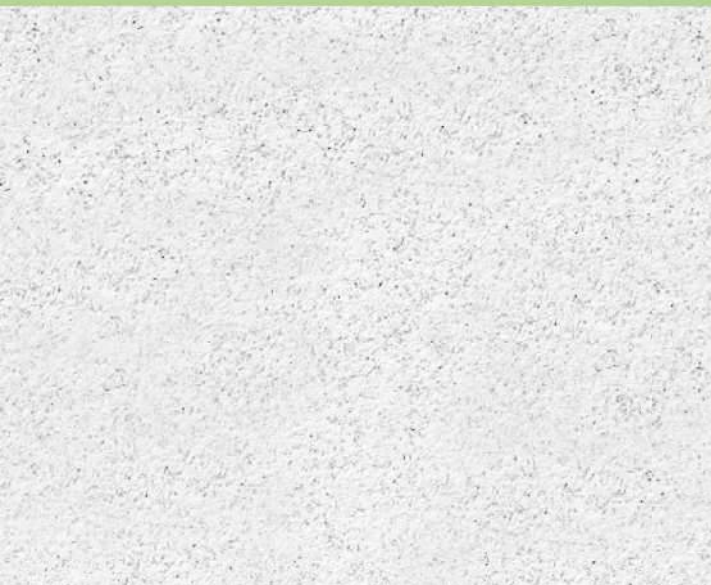

Fine-textured panel

Grid Options

DONN DX 24mm



DONN Certricitée 15mm



30
 Year System Warranty
 - No visible sag
 - Mould/mildew protection

Mars CLIMAPlus Panels

Edge	Panel Size ^{1,2}	Class	Item No	NRC ³	CAC ³	LR ⁴	Colour	Grid Options	VOC Emissions	Recycled Content
	600 x 600 x 19mm	Class A	ME86185	.70	35-39	.89	White	A, C	Low	76%
	1200 x 600 x 19mm	Class A	ME88185	.70	35-39	.89	White	A, C	Low	76%
	600 x 600 x 19mm	Class A	ME86785	.70	35-39	.89	White	B	Low	76%
	1200 x 600 x 19mm	Class A	ME88785	.70	35-39	.89	White	B	Low	76%
	600 x 600 x 19mm	Class A	ME86985	.70	35-39	.89	White	D	Low	76%
	1200 x 600 x 19mm	Class A	ME88985	.70	35-39	.89	White	D	Low	76%

Legend Φ SAC 0.85 + all options (500-4000 Hz speech range)

Low Emissions (VOC Class)

Low emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on CHPS database for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions is available on request. Low emitting is defined as having less than 0.009 mg/m³.

CLIMAPlus Performance

Lifetime system Warranty (maximum of 30 years) to withstand conditions up to 40°C/95%RH when used with USG DONN suspension systems.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on panel composition of post-consumer and pre-consumer (post industrial) recycled content per FTC guidelines.

A	B	C	D
DX [®]	DX	Centricitee DXT	Centricitee DXT

**Physical Data/
Footnotes**

<p>Weight 4.7 kg/m²</p> <p>Environmental Limitations 40°C, 95% RH max.</p> <p>Thermal Resistance R 0.39 °C/W</p> <p>Maximum Backloading 0 kg/m²</p> <p>Maintenance Can be cleaned easily with a soft brush or vacuum</p> <p>Installation Shall not begin until the building is fully enclosed, watertight, dry, permanent heating and cooling equipment is in operation, residual moisture from wet trades (eg. terrazzo, concrete, plaster) has dissipated, and is free of chemical fumes. Do not mix production lots in the same ceiling area.</p> <p>Reaction to Fire</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Standard</th> <th>Flame Spread</th> <th>Smoke Developed</th> </tr> </thead> <tbody> <tr> <td>ASTM E84</td> <td>< 25</td> <td>< 50</td> </tr> <tr> <td>AS/NZS 3837</td> <td colspan="2">Group Number Classification : 1 unsprinklered</td> </tr> <tr> <td>ISO 5660 Parts 1 & 2</td> <td colspan="2">Group Number Classification : 1 - S</td> </tr> </tbody> </table>	Standard	Flame Spread	Smoke Developed	ASTM E84	< 25	< 50	AS/NZS 3837	Group Number Classification : 1 unsprinklered		ISO 5660 Parts 1 & 2	Group Number Classification : 1 - S		<p>Scrubability Exceeds 1000+ scrub cycles without surface break or the extent of abrasion (ASTM D2486).</p> <p>Washability Exceeds 1000+ wash cycles without surface break or the extent of abrasion (ATSM D4828).</p> <p>Water resistance Absorption of 1,660 gm/m² per Cobb test (T441 om-84).</p> <p>Proprietary technology This product's unique combination of sag resistance and sound performance results from proprietary technology.</p>	<p>Cleaning Recommendations To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface. To disinfect panel, lightly spray surface and wipe clean with a clean, white cloth. Acceptable colourless disinfectants include: - Hydrogen peroxide - Isopropyl alcohol - Quaternary ammonium - Sodium hypochlorite</p> <p>Footnotes</p> <ol style="list-style-type: none"> Not all panel sizes available in all geographic areas Some imperial sizes available to order Acoustic Test Standards NRC to ASTM C423 CAC to ASTM E1414 LR values are shown as averages Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits and retards the growth of mould/ mildew. 	<p>Available from</p> <p>Renhurst CEILING SYSTEMS Tel: 1300 655 035 www.renhurst.com</p>
Standard	Flame Spread	Smoke Developed													
ASTM E84	< 25	< 50													
AS/NZS 3837	Group Number Classification : 1 unsprinklered														
ISO 5660 Parts 1 & 2	Group Number Classification : 1 - S														