



Co-ordinate Series




Daiken were established in 1945 and have grown to be a world leader in the manufacturing of building materials.

Daiken Excel-Tone MR ceiling tiles provide outstanding moisture resistance and are guaranteed for 10 years against visible sagging.


Manufactured from select rockwool fibers and special binders, Daiken ceiling tiles offer fantastic acoustic absorption.

The mineral rockwool fibers are uniformly interwoven by a unique wet felting process to form rigid tiles that provide superior fire resistance.


The Co-ordinate series feature the New NDF pattern and use rebated lines to the face of the tile to create a unique architectural look.

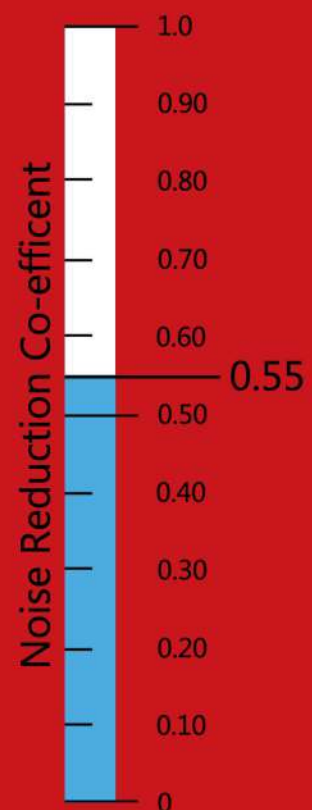



Co-ordinate 10 NDF 1200 x 600 x 15mm

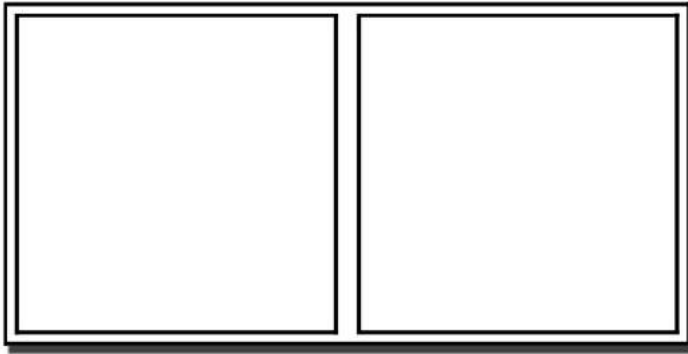


Co-ordinate 20 NDF 1200 x 600 x 15mm

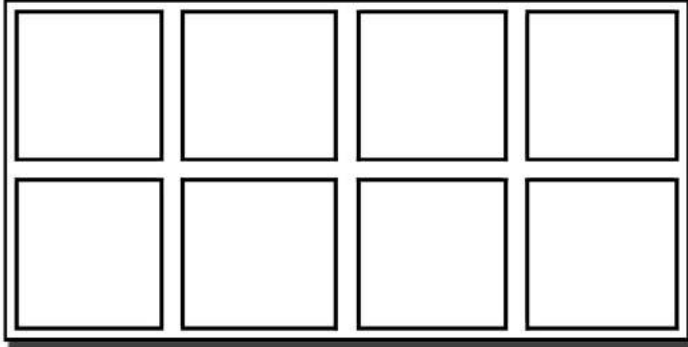

Co-ordinate 40 NDF 1200 x 600 x 15mm

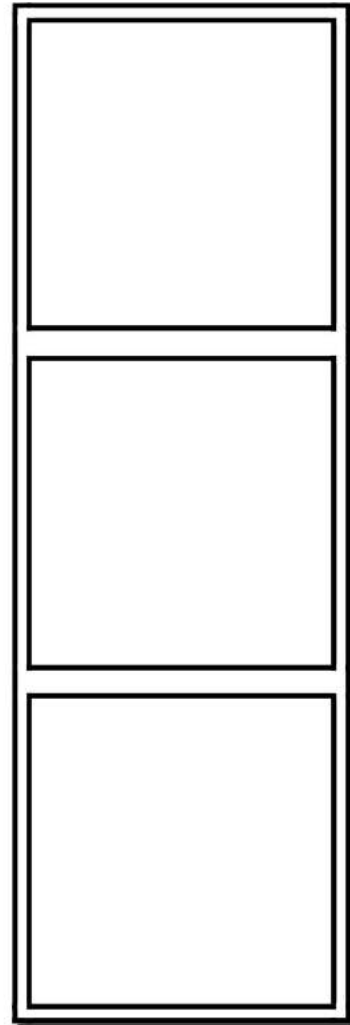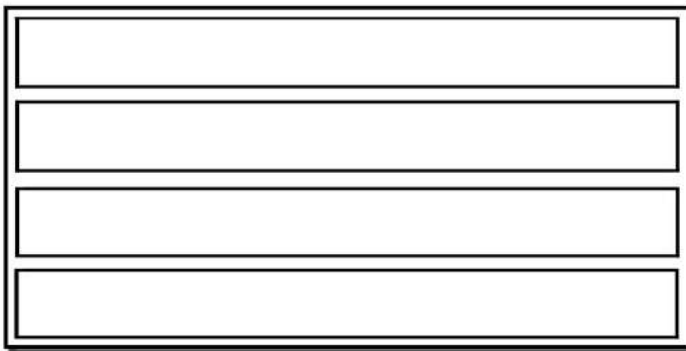

Co-ordinate 30 NDF 1350 x 450 x 15mm

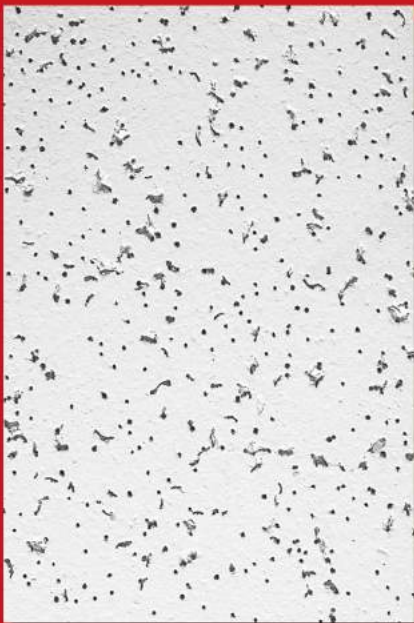

Physical Properties	Value/Grade	Test Method
Moisture Content	2%	JIS A6301
Modulus of Rupture	17Kgf/cm <sup>2</sup>	JIS A6301
Fire Propagation Test	Class 0	BS476 Part 6
Flame Spread	0	Aust Std 1530.3
Thermal Conductivity	0.045 kcal/mh°C	JIS A 1412
Light Reflectance	>80%	ASTM E1477
Ceiling Attenuation Class (CAC)	36	Aust Std 2499 (Two-room method)
Sound Absorption Coefficient (NRC)	0.55	ASTM C423